

## CARBSORB® 30 AND 40

### Coal Based Granular Activated Carbon

#### DESCRIPTION

**CARBSORB® 30 and 40** are bituminous coal based granular activated carbons designed to provide cost effective solution for water and liquid phase applications. **CARBSORB® 30 and 40** offer a number of operating advantages over low cost Liquid phase carbon that exist in the market.

#### FEATURES

Coal based granular carbons have several properties which explain their performance in a wide range of applications.

- The adsorption capacity allows for effective removal of organic contaminants, taste, and odour.
- Bituminous coal base produces a product with high hardness ensuring excellent resistance to abrasion caused by transport, mechanical stress, and backwashing.
- Product mesh size allows for limited pressure drop.
- **CARBSORB® 30 and 40** comply with EN12915.

#### SELECTION

**CARBSORB® 30 and 40** are suitable for use in the following applications:

- Potable water treatment
- Groundwater remediation
- Home water filtration
- Other industrial applications where removal of organics is required

**CARBSORB® 30 and 40** have a typical mean particle diameter of 1.6 mm and 1.0 mm respectively. In general, the smaller the granule size, the better the adsorption performance, therefore **CARBSORB® 40** should be selected. If the pressure drop is too high with **CARBSORB® 40**, **CARBSORB® 30** should be selected.

#### PROPERTIES

SPECIFICATIONS	CARBSORB® 30	CARBSORB® 40
Iodine Number, min., mg/g	900	900
Hardness Number, min.	90	90
Moisture Content, as packed, max., % w/w	2	2
Mesh Size, US Sieve Series	8x30	12x40
> 8 mesh (2.36 mm), max. %	15	-
> 12 mesh (1.70 mm), max. %	-	5
< 30 mesh (0.60 mm), max. %	4	-
< 40 mesh (0.42mm),max.%	-	4

(Please refer to the Sales Specification Sheets, which state the Chemviron Carbon test method used to define the above specifications. Copies are available upon request.)

TYPICAL PROPERTIES	CARBSORB® 30	CARBSORB® 40
Methylene blue number	230	260
Total Surface Area, ( $N_2$ BET method <sup>2</sup> ), m <sup>2</sup> /g	900	900
Backwashed and Drained Bed Density <sup>1</sup> , kg/m <sup>3</sup>	420	420
Effective size	0.9	0.6
Uniformity coefficient	1.8	1.8
Mean Particle Diameter, mm	1.6	1.0
Dechlorination Half Length, cm	4	2

<sup>1</sup> Backwashed and drained density is used for adsorber sizing.

<sup>2</sup> Brunauer, Emmett and Teller, J.Am. Chem. Soc. 60. 309 (1938).

#### RECYCLING BY THERMAL REACTIVATION



Once granular carbon is saturated or the treatment objective is reached, it can be recycled, by thermal reactivation, for reuse. Reactivation involves treating the spent carbon in a high temperature reactivation furnace to over 800°C. During this treatment process, the undesirable organics on the carbon are thermally destroyed. Recycling by thermal reactivation is a highly skilled process to ensure that spent carbon is returned to a reusable quality. **Chemviron Carbon** operates Europe's largest reactivation facilities and daily recycles large quantities of spent carbon for a diverse range of customers. Recycling activated carbon by thermal reactivation meets the environmental need to minimise waste, reducing CO<sub>2</sub> emissions and limiting the use of the world's resources.

**Chemviron Carbon** can offer a recycling service for **CARBSORB® 30 and 40** to avoid disposal of the spent activated carbon.



## Product Bulletin

Visit our website at [www.chemvironcarbon.com](http://www.chemvironcarbon.com) to learn more about our complete range of products and services, and local contact information.

## TYPICAL PRESSURE DROP CURVES FOR A BACKWASHED AND SEGREGATED BED

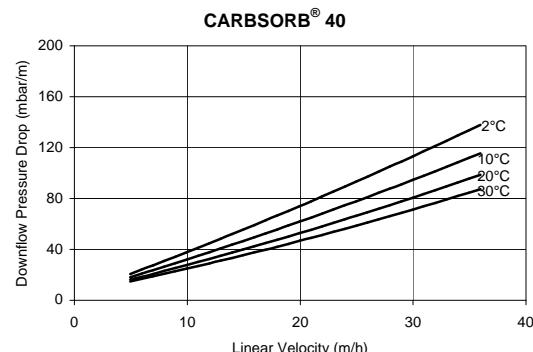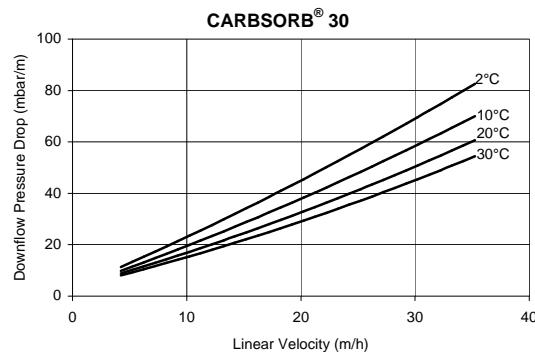

## TYPICAL BED EXPANSION CURVES FOR A BACKWASHED AND SEGREGATED BED

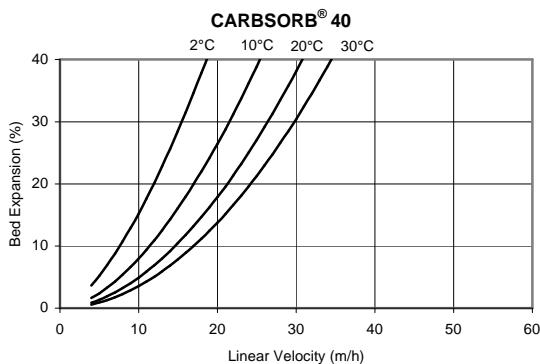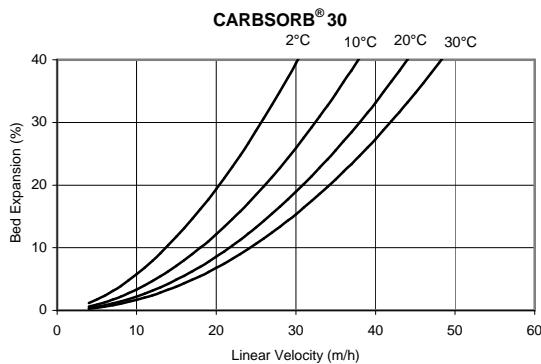

## DESIGN INFORMATION

The design of a granular activated carbon treatment system will depend on the nature of the stream to be treated. The following are typical design parameters for organics removal with CARBSORB® 30 and 40:

- Superficial contact time 10- 60 min.
- Bed depth 1-4 m
- Linear velocity 5-15 m/h
- Backwash bed expansion 20 %

## PACKAGING

- 25 kg bags
- Big bags
- Bulk tanker

## SAFETY MESSAGE

Wet activated carbon preferentially removes oxygen from air. In closed or partially closed containers and vessels, oxygen depletion may reach hazardous levels. If workers are to enter a vessel containing carbon, appropriate sampling and work procedures for potentially low-oxygen spaces should be followed.

## QUALITY

Each of our worldwide operations has achieved ISO 9001:2000 certification for their quality management system related to activated carbon. **Chemviron Carbon** guarantees the specifications against representative sampling. For food grade applications, it is recommended to check the quality of the initial effluent before putting the adsorber into service.

CHEMIRON CARBON

**Chemviron Carbon**, the European operation of Calgon Carbon Corporation, is a global manufacturer, supplier, and developer of granular activated carbon, innovative treatment systems, value added technologies, and services for optimising production processes and safely purifying the environment.

With our experience developed since the early years of the twentieth century, facilities around the world and a world-class team of over 800 employees, Calgon Carbon Corporation can provide the solutions to your most difficult purification challenges.

**N.B.** Chemviron Carbon reserves the right to change specifications without notice. All rights reserved for reproduction in part or in full without prior permission from Chemviron Carbon.

Visit our website at [www.chemvironcarbon.com](http://www.chemvironcarbon.com)

W-2080 – F – 19.03.2009



**Corporate Headquarters**  
400 Calgon Carbon Drive  
Pittsburgh, PA 15205, USA  
Tel.: +1 (0) 412 787-6700  
Fax: +1 (0) 412 787-6713

**Chemviron  
Carbon**

**European Operations of  
Calgon Carbon Corporation**  
Zoning Industriel C de Feluy  
B - 7181 Feluy, Belgium  
Tél.: +32 (0) 64 51 18 11  
Fax: +32 (0) 64 54 15 91

## Your local office

